

# User Manual

## Color Door Camera DRC-4PIP




www.commax.com

COMMAX Co.,Ltd.




- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

## 1. Part Names.

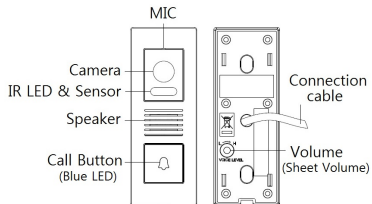


※ During a camera call/talk, the LED (BLUE) on the call button lights up

## 2. Package contents




## 3. Wiring and Installation




[FIG.2]

### WIRING DIAGRAM



- ① Match the fix the whole in the wall and the fixing bracket [FIG.1]
- ② Match and connect monitor line as shown below [FIG.2]  
(#1: Voice, #2: GND, #3: DC12V, #4: Video)
- ③ Adjust camera location on the wall by checking the image on monitor screen and fix its location
- ④ Connect the Door Release Connection Line as shown below [FIG.2] (#5: Open1, #6: Open2)

- You can adjust speaker volume using driver as shown below.
- After adjusting the volume, use the 'SHEET VOLUME' included in the accessory to close the hole before installing.

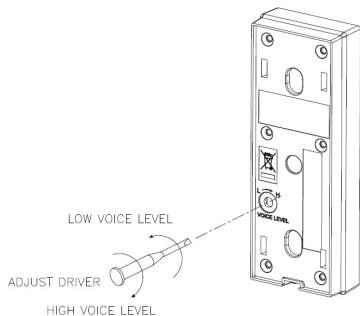

## 4. Specification

Model No.	DRC-4PIP				
Rated Voltage	12V $\overline{\text{---}}$ (Supplied from monitor)				
Wiring	4 wires(polarity)to a monitor				
	2 wires(non-polarity)to a electric door lock				
Video Transmission Standard	NTSC or PAL STANDARD.				
Sensor Type	C-MOS (COLOR) - CVBS				
Transmission	Simultaneous communication				
Minimum Illumination	0.1 Lux(within300mm)				
LED	Embedded IR LED(Night working)				
Effective Viewing Angle	136° (D)				
Operating Temperature	-30°C~+50°C				
Dimension (mm)	50(W) X 135(H) X 23(D)				
Distance between a door camera and monitor	Diameter(pie)	Ø0.5	Ø0.65	Ø0.8	Ø1
	Distance(meter)	28m	50m	70m	115m

- ※ Please note that this product is equipped with an IR LED, and the image may be displayed black and white at night.
- ※ This product can be used for door lock systems that use DC power. (Max. switching voltage and current : 2A 30V DC)

# COMMAX

**COMMAX Co.,Ltd.**

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea  
Int'l Business Dept. : Tel.; +82-31-7393-540~550 Fax.; +82-31-745-2133  
Web site : [www.commax.com](http://www.commax.com)

*Edited.2021.10.26*

*Printed In Korea / 2021.10105*