


NOTICE New RX-Multi 300-868MHz

1. Specifications RX-Multi

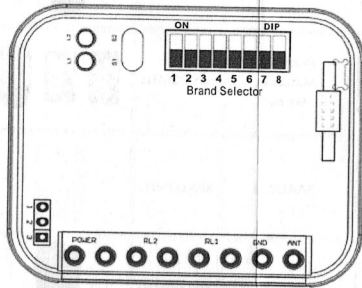

2. Brand selector

With 8 bits dip switch, the user can make different combinations for different remote brands. The brand selections are shown in table 1.

3. Learn Button and LED

In RX-Multi receiver, there are 2 independent channels. Each channel has independent learn buttons L1, L2 and L1, L2.

4. Power Input Selector

The RX-Multi can be worked at the input AC/DC 12V~30V. However, it's better to change the PIS according to the power input. If the input is greater than 24V, shorten pin 2&3; shorten 1&2 if input is less than 24V.

5. Exchangeable Radio

The memory card can be removed from board for read, copy and backup.

6. How to entry remote and Erase all remote

Entry one button remote:

1. First, selecting the correct brand for remote will be entry by dip switch;
2. Press the learn button, the LED turns on. Press the button on the remote, the LED flashes 4 times, this button entry into the RX-Multi successfully.
3. Repeat step 2 for another button.
4. 2 channels work at same.

Erase all data in memory card :

Pressing and holding either learn button, the LED starts to flash. Keep holding pressing this button until the LED turns off. All data in the memory card will be erased permanently.

Notice: Be careful for erasing all data in the memory card. The data will be erased permanently and cannot be recovered.

BRANDS SELECTION

Item	Selection Dipswitch	Marcas/Brands	Frec.	Observations
1		NICE FLORS	433.92MHz	
2		MARANTEC	433.92MHz	
3		UNIVERSAL CODE/CODIGO FIJO	433.92MHz	Fixe code
4		FAACSLH Rolling Code	433.92MHz	
5		Liftmaster	433.92MHz	
6		Universal Rolling code	433.92MHz	433.92MHZ
7		CODIGO FIJO	300.00MHz	frec. 300.00MHz

BRANDS SELECTION

8		CODIGO FIJO	310.00MHz	frec.310.00MHz
9		CODIGO FIJO	315.00MHz	frec.315.00MHz
10		CODIGO FIJO	318.00MHz	frec.318.00MHz
11		CODIGO FIJO	330.00MHz	330.00MHz
12		CODIGO FIJO	390.00MHz	390.00MHz
13		Rollingcode fixe code	315.00MHz	
14		GOJCM	868MHz	
15		Liftmaster RollingCode Billioncode	390.00MHz	

BRANDS SELECTION

16		Liftmaster RollingCode	315.00MHz	
17		Hormann Marantec Berner	868.00MHz	
18		FAACSLH	868.00MHz	
19		Prastel	433.00MHz	
20		Sommer	868.00MHz	
21		Sommer	433,34MHz	
22		Liftmaster RollingCode	868.00MHz	
23		Clemtsa Mastercode	433MHz	