


**110V/220V 300W**  
**Multifunctional**  
**portable energy storage power supply**  
**Product Specification**

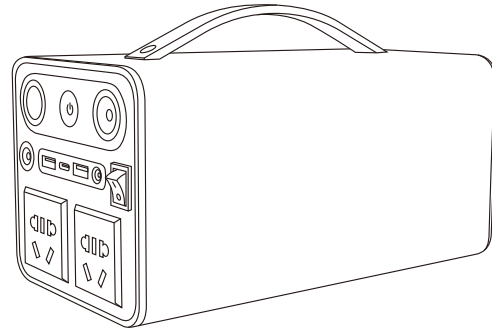


Thank you for purchasing multifunctional portable energy storage power supply.  
Please read the instructions carefully before using the power supply.

**SPECIFICATION PARAMETERS**

<b>Product name</b>	<b>Multifunctional portable energy storage power supply</b>
<b>Battery type</b>	Rechargeable lithium ion battery
<b>Input charging power</b>	DC12V(9-12.6V)
<b>AC inverter output</b>	110V/60Hz~220V/50Hz 300W
<b>DC output</b>	9V-12.6V 10A
<b>QC3.0 output</b>	4.8V-12V 3A
<b>USB output</b>	5V/2.1A
<b>PD fast charge output</b>	25W
<b>Total output power</b>	300W
<b>size</b>	295*190*180 mm
<b>weight</b>	3400G
<b>Working environment temperature</b>	0°C~40°C
<b>Working environment humidity</b>	5%~90%
<b>Storage temperature</b>	-10°C~55°C

Implementation standard: GB/T35590-2017 GB/T18287-2000

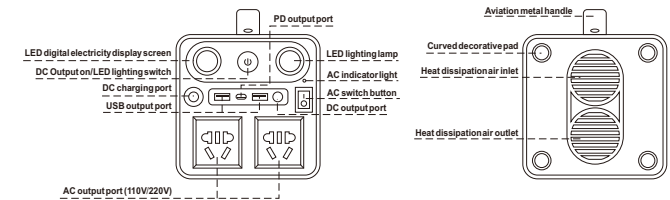

**Use the original power adapter to charge the product**

1. Select the original power adapter and connect its connector with the corresponding input port of the product;
2. Connect the power adapter with the 110 V plug-in port, and the power indicator on the digital display screen starts to flash, which means charging in place.

**Charging digital devices**

1. Select the original charging line of the digital product, connect one end to the digital product, and the other end to the output port, and then turn on the pup43 power switch;
2. Check whether the power of the digital product matches the output power of the product: press the on / of switch to turn on the 110 V power supply, the indicator light will be on, and the logarithmic code device will charge, and the display screen will show the current power.

**Low power alarm**

When the power level is less than 10%, it will enter the low voltage alarm, and the display / light will start to flash. When charging the equipment, it will flicker until it is out of power. When the device is not charged, it will flash for about 5 seconds and then go out.

**other**

Press the LED button to turn on the lighting function, press the key again to turn off the LED light; press the button for 3 seconds to start the SOS rescue flashing function.

**MATTERS NEEDING ATTENTION**

1. Before using this product, be sure to read the product manual carefully and operate correctly according to the instructions.
2. Please do not disassemble the device by yourself. This product is not equipped with any self detachable / maintenance parts.
3. It is strictly forbidden to let the product continuously contact objects or heat sources above 55C, throw the product into fire and water, and charge mobile power supply in the environment below 0C.
4. Please do not vibrate, knock or impact the product. If the product encounters strong collision, strong extrusion, or falling from a height of more than 1 meter, shell deformation and bulge, please stop using this product.
5. Do not place the product in the sun, do not put the product in the environment with corrosive substances, and do not use other chemical solutions to clean the product
6. When the car charges the product, it is recommended to start the car and recharge it
7. In case of abnormal heating or liquid leakage, please stop using immediately. If the liquid is accidentally splashed into the eyes, do not rub the eyes. Clean the eyes with clean water immediately. If it is serious, please see a doctor immediately.
8. In order to avoid the abnormality of this product, it is recommended to use the original charging line, adapter and power adapter.
9. Please dispose the waste mobile power according to the national environmental protection regulations.

**WARNING** Please use this product according to the attached instructions. Ignoring the instructions may cause fire or other damage to the product. Keep this product away from children

**Toxic and harmful substances or elements schedule**

Part name	Toxic and harmful substances or elements					
	lead (Pb)	mercury (Hg)	cadmium (Cd)	Hexavalent chromium (Cr6+)	Polybrominated biphenyls (PBB)	Polybrominated biphenyl ether (PBDE)
Main configuration	0	0	0	0	0	0
Machine parts	0	0	0	0	0	0

"0" means that the content of the hazardous and toxic substance in all homogeneous materials of the component is below the limit specified in GB / 126572 standard.  
"X" indicates that the content of the hazardous and toxic substance in at least one homogeneous material of the component exceeds the limit specified in GB / 126572 standard.  
Note: the reason why this product is marked with "X" is that there is no alternative technology or component available at this stage.

We sincerely thank you for purchasing and using our product!  
This product has passed strict quality inspection. According to the instructions of this warranty card, we are responsible for free maintenance of hardware failure caused by product quality problems under normal use within the warranty period.

**Warranty description** (the warranty scope is limited to the main engine, excluding accessories and free gifts)

1. All users who purchase this product will enjoy the package service according to the relevant national regulations.
2. If the purchased product itself has quality problems and is not damaged by human beings, it can be replaced within 15 days without being disassembled and repaired and packaged in good condition.
3. Purchase this product to enjoy one year free maintenance service.
4. Under the following circumstances, the free warranty will be invalid, and the maintenance service shall be provided, but the corresponding accessories and manual repair fees shall be charged for the maintenance.
  - ① the damage caused by human factors, including the damage caused by using under abnormal working environment and not following the instruction manual, etc.
  - ② The user disassembles the machine without permission, repairs, refits, or repairs by the company's non maintenance department or non authorized organization;
  - ③ Damage caused by force majeure;
  - ④ There is no product warranty card and valid purchase certificate (invoice), and the user information file cannot be verified.
  - ⑤ Goods bar code and production date are torn (outer package).
  - ⑥ Product QR code is damaged (product ontology).
  - ⑦ Beyond the warranty period.