


2.4GHz+2.4GHz

2.4GHz 802.11b/g/n Signal Booster

DATA SHEET

Description

The 2.4 GHz WLAN signal booster is designed for IEEE 802.11b/g/n Wireless LAN applications. It adopts the direct sequence spread spectrum(DSSS) and orthogonal frequency division multiplexing (OFDM) technology of WLAN communication. The product is compatible with time division duplexing (TDD) method of WLAN and using rapid microwave detection technology to provide high linearity amplification. The signal booster can work with most WLAN/Wi-Fi devices and increase the WLAN signal strength, therefore a larger WLAN coverage and more stable transmission rate.

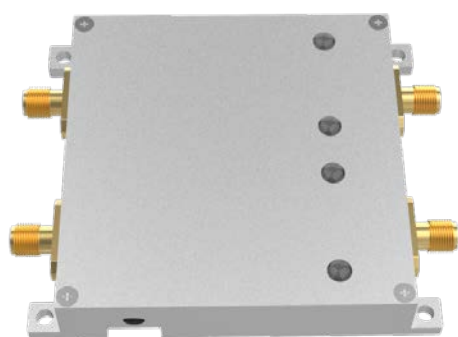

Key Features

- 20X the power, improving the link quality and coverage of certified WLAN devices
- 2.5dB ultra-low noise
- Wide 6v to 16v operating input range
- Working with certified IEEE 802.11b/g/n Wireless LAN devices
- Simply plug and play, no software is required


Specifications

- Frequency Range: 2.4~2.5GHz
- Operating Voltage: 6~16V
- Receiving Gain: 10dB±1 (2.4GHz)
- Transmission Gain: 13dB±1(2.4GHz)
- Input Trigger Power: Min: 3dBm Max: 20dBm
- Maximum Output Power(P1dB): 36dBm(4W)
- EVM: 3%@28dBm 802.11g 54Mbps OFDM 64QAM BW 20MHz
- DC Supply Current: 435mA@Pout 28dBm 9V

2.4GHz+2.4GHz

2.4GHz 802.11b/g/n Signal Booster

- Noise Figure: < 2.5dB
- TX/RX Switch Time Delay: < 1us
- LED Indicator: Transmitter: green; Receiver: red
- Operating Ambient Temperature: -40C°~+70C°
- Operating Humidity: up to 95% rel. humidity
- Dimension: 76.5mm×66mm×13mm
- Weight: 115 net

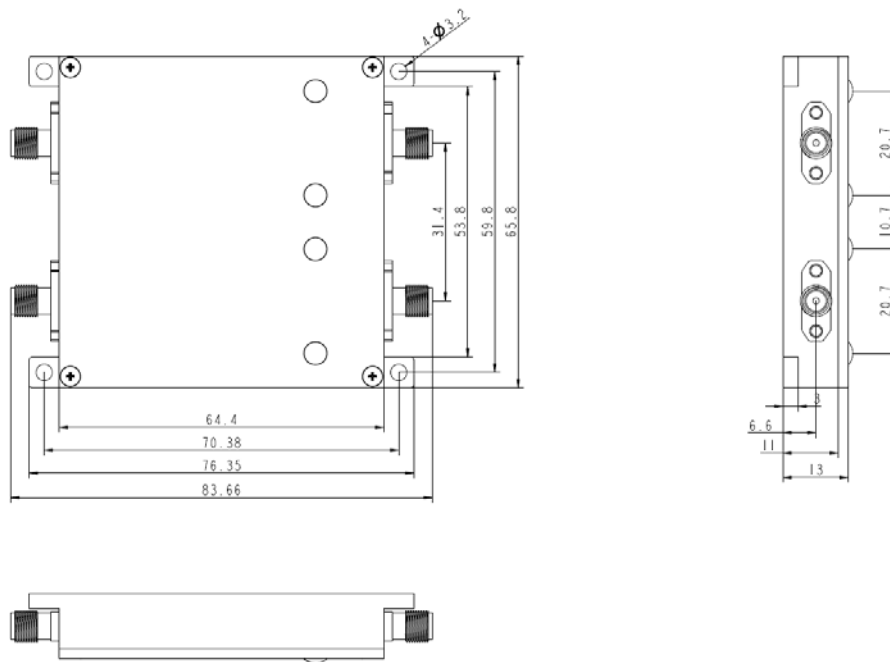

Installation Instructions

- Step1: Disconnect power supply to AP/Router.
- Step2: Detach the antenna from your certified wireless AP/Router
- Step3: Connect Rg316 cable to the booster and AP/Router
- Step4: Connect the antenna to the other end of the booster
- Step5: Connect the power supply to the booster first and subsequently the AP/Router