

VTH5221DW-C-S1

Wi-Fi Indoor Monitor



Technical Specification

Model	VTH5221DW-C-S1
-------	----------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	2.2mm
Angle of View	D:125° H:105°

Audio

Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Display

LCD Screen	7" 1024x600, Capacitive
------------	-------------------------

Operation Mode

Input	Touch buttons
-------	---------------

Interface

Wired Zones	6 on-board zones
Wireless Zones	6 wireless zones
Alarm Out	1
RS485	1

Features

- 7" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- 6ch wired alarm integration, 6ch wireless alarm integration(433MHZ)
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)




Network

Wi-Fi	IEEE802.11b/g/n
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP


General

Memory Slot	Micro SD, Max 32GB
Installation	Surface
Power	DC 12V, PoE (802.3af)
Power Consumption	Standby ≤1W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	215.0mm×140.0mm×21.0mm
Weight	0.8Kg

Dimensions

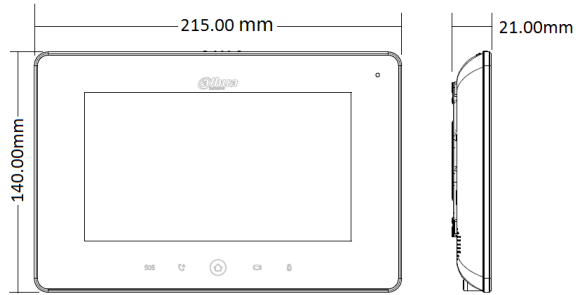

View Area

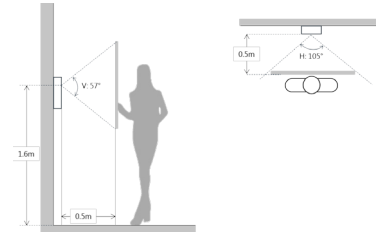

Application

