


## High frequency secondary rectifier

Datasheet - production data

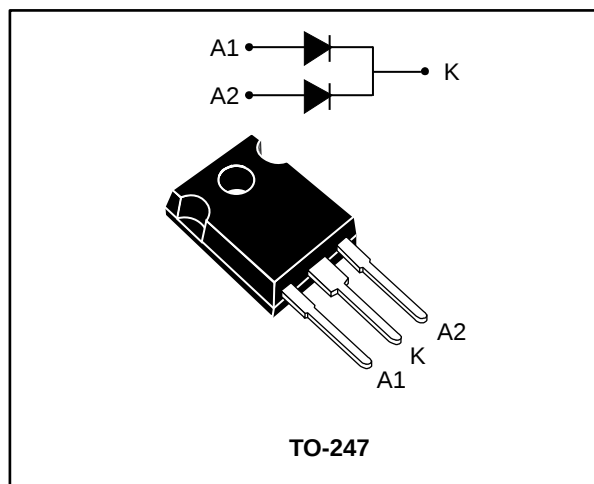

### Description

Dual rectifier suited for switch mode power supply and high frequency DC to DC converters. Packaged in TO-247, this device is intended for use in low voltage, high frequency inverters, free wheeling operation, welding equipment and telecom power supplies.

Table 1: Device summary

| Symbol          | Value    |
|-----------------|----------|
| $I_{F(AV)}$     | 2 x 30 A |
| $V_{RRM}$       | 300 V    |
| $V_F$ (max.)    | 1 V      |
| $t_{rr}$ (max.) | 55 ns    |

### Features

- Combines highest recovery and voltage performance
- Ultrafast, soft and noise-free recovery
- Low inductance and low capacitance allow simplified layout

# 1 Characteristics

**Table 2: Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

| Symbol              | Parameter                                       |                                   |            | Value       | Unit |
|---------------------|-------------------------------------------------|-----------------------------------|------------|-------------|------|
| V <sub>RRM</sub>    | Repetitive peak reverse voltage                 |                                   |            | 300         | V    |
| I <sub>F(RMS)</sub> | Forward rms current                             |                                   |            | 60          | A    |
| I <sub>F(AV)</sub>  | Average forward current<br>δ = 0.5, square wave | T <sub>c</sub> = 135 °C           | Per diode  | 30          | A    |
|                     |                                                 |                                   | Per device | 60          |      |
| I <sub>FSM</sub>    | Surge non repetitive forward current            | t <sub>p</sub> = 10 ms sinusoidal |            | 300         | A    |
| I <sub>RSM</sub>    | Non repetitive peak reverse current             | t <sub>p</sub> = 100 μs square    |            | 4           | A    |
| T <sub>stg</sub>    | Storage temperature range                       |                                   |            | -65 to +175 | °C   |
| T <sub>j</sub>      | Maximum operating junction temperature          |                                   |            | +175        | °C   |

**Table 3: Thermal parameters**

| Symbol        | Parameter        |           | Maximum | Unit |
|---------------|------------------|-----------|---------|------|
| $R_{th(j-c)}$ | Junction to case | Per diode | 1       | °C/W |
|               |                  | Total     | 0.55    |      |
| $R_{th(c)}$   | Coupling         |           | 0.1     |      |

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j (\text{diode1}) = P_{(\text{diode1})} \times R_{th(j-c)(\text{per diode})} + P_{(\text{diode2})} \times R_{th(c)}$$

**Table 4: Static electrical characteristics**

| Symbol      | Parameter               | Test conditions       |                      | Min. | Typ. | Max. | Unit          |
|-------------|-------------------------|-----------------------|----------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$  | $V_R = 300\text{ V}$ | -    |      | 60   | $\mu\text{A}$ |
|             |                         | $T_j = 125\text{ °C}$ |                      | -    | 60   | 600  |               |
| $V_F^{(2)}$ | Forward voltage drop    | $T_j = 25\text{ °C}$  | $I_F = 30\text{ A}$  | -    |      | 1.25 | V             |
|             |                         | $T_j = 125\text{ °C}$ |                      | -    | 0.85 | 1    |               |

**Notes:**

(1)Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$

(2)Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the maximum conduction losses, use the following equation:

$$P = 0.75 \times I_{F(AV)} + 0.008 \times I_{F(RMS)}^2$$

Table 5: Dynamic characteristics

| Symbol       | Parameters               | Test conditions       |                                                                                                          | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|-----------------------|----------------------------------------------------------------------------------------------------------|------|------|------|------|
| $t_{rr}$     | Reverse recovery time    | $T_j = 25\text{ °C}$  | $I_F = 0.5\text{ A};$<br>$I_{rr} = 0.25\text{ A},$<br>$I_R = 1\text{ A}$                                 | -    |      | 40   | ns   |
|              |                          |                       | $I_F = 1\text{ A},$<br>$dI_F/dt = -50\text{ A}/\mu\text{s},$<br>$V_R = 30\text{ V}$                      | -    |      | 55   |      |
| $t_{fr}$     | Forward recovery time    | $T_j = 25\text{ °C}$  | $I_F = 30\text{ A};$<br>$dI_F/dt = 200\text{ A}/\mu\text{s},$<br>$V_{FR} = 1.1 \times V_{F\text{ max.}}$ | -    |      | 350  | ns   |
| $V_{FP}$     | Forward recovery voltage |                       |                                                                                                          | -    |      | 5    | V    |
| $S_{factor}$ | Softness factor          | $T_j = 125\text{ °C}$ | $V_{CC} = 200\text{ V},$<br>$I_F = 30\text{ A},$<br>$dI_F/dt = 200\text{ A}/\mu\text{s}$                 | -    | 0.3  |      | -    |
| $I_{RM}$     | Reverse recovery current |                       |                                                                                                          | -    |      | 11   | A    |

## 1.1 Characteristics (curves)

Figure 1: Conduction losses versus average current (per diode)

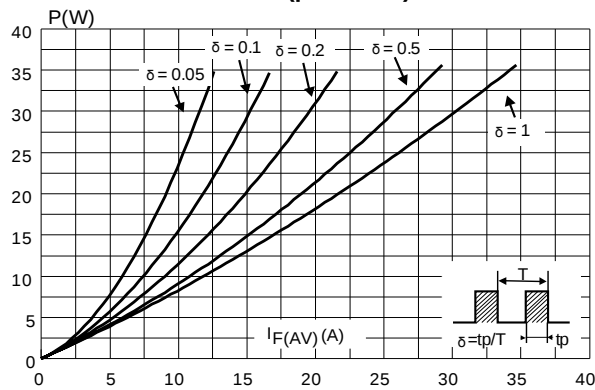


Figure 2: Forward voltage drop versus forward current (maximum values, per diode)

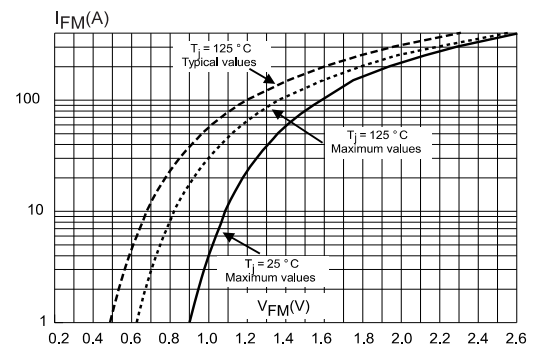


Figure 3: Relative variation of thermal impedance junction to case versus pulse duration (TO-247)



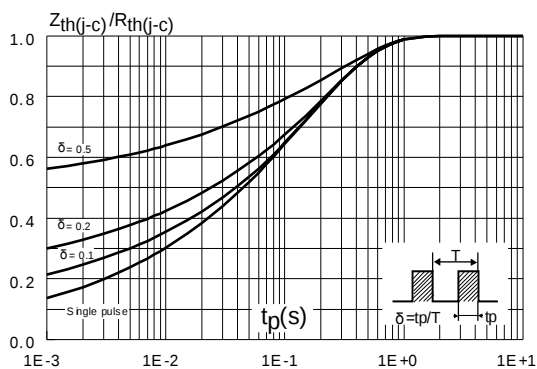



Figure 4: Peak reverse recovery current versus  $di_F/dt$  (90% confidence, per diode)

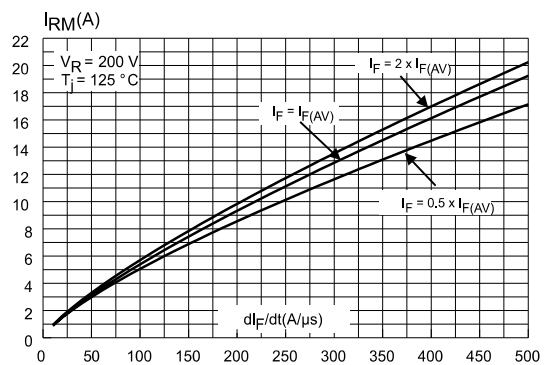


**Figure 5: Reverse recovery time versus  $di_F/dt$  (90% confidence, per diode)**

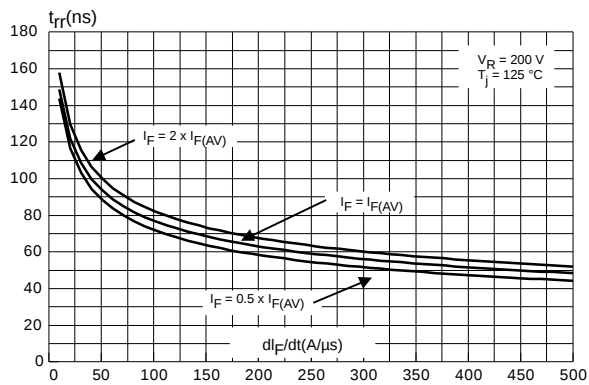


**Figure 6: Softness factor (tb/ta) versus  $di_F/dt$  (typical values, per diode)**

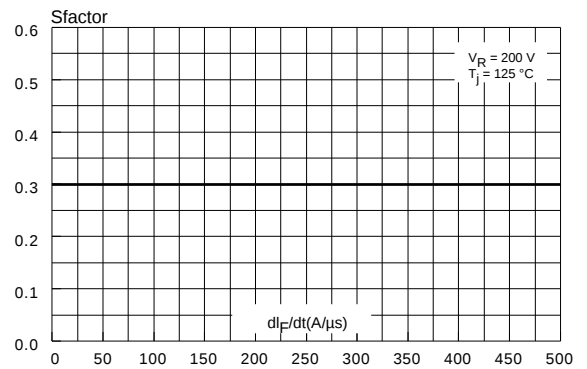


**Figure 7: Relative variation of dynamic parameters versus junction temperature ( $T_J = 125$  °C)**

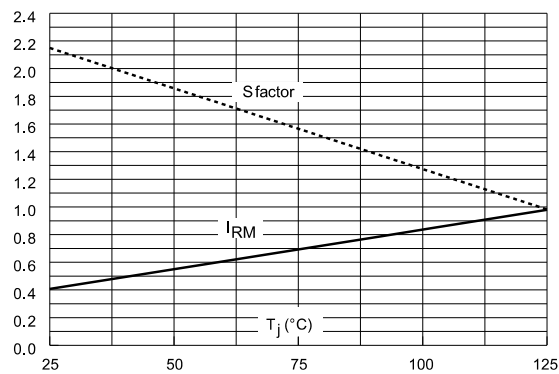

**Figure 8: Transient peak forward voltage versus  $di_F/dt$  (90% confidence, per diode)**

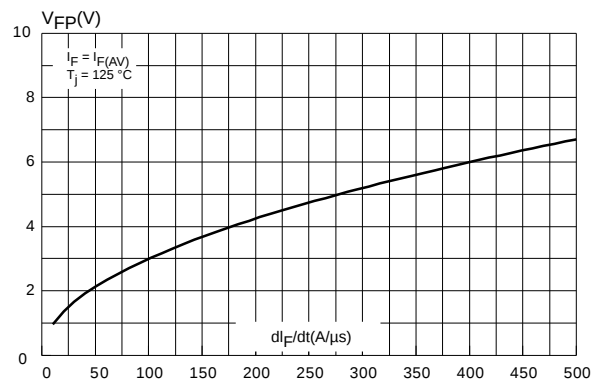

**Figure 9: Forward recovery time versus  $di_F/dt$  (90% confidence, per diode)**

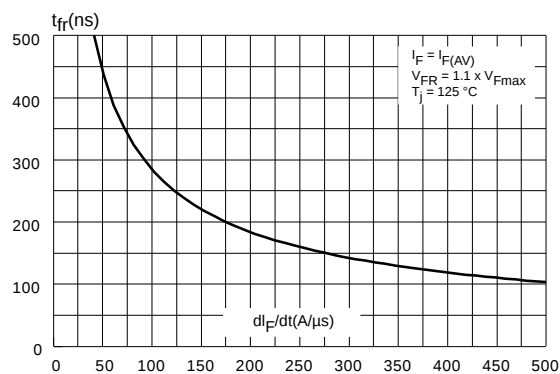

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque values: 0.55 N·m
- Maximum torque value: 1.0 N·m

### 2.1 TO-247 package information

Figure 10: TO-247 package outline

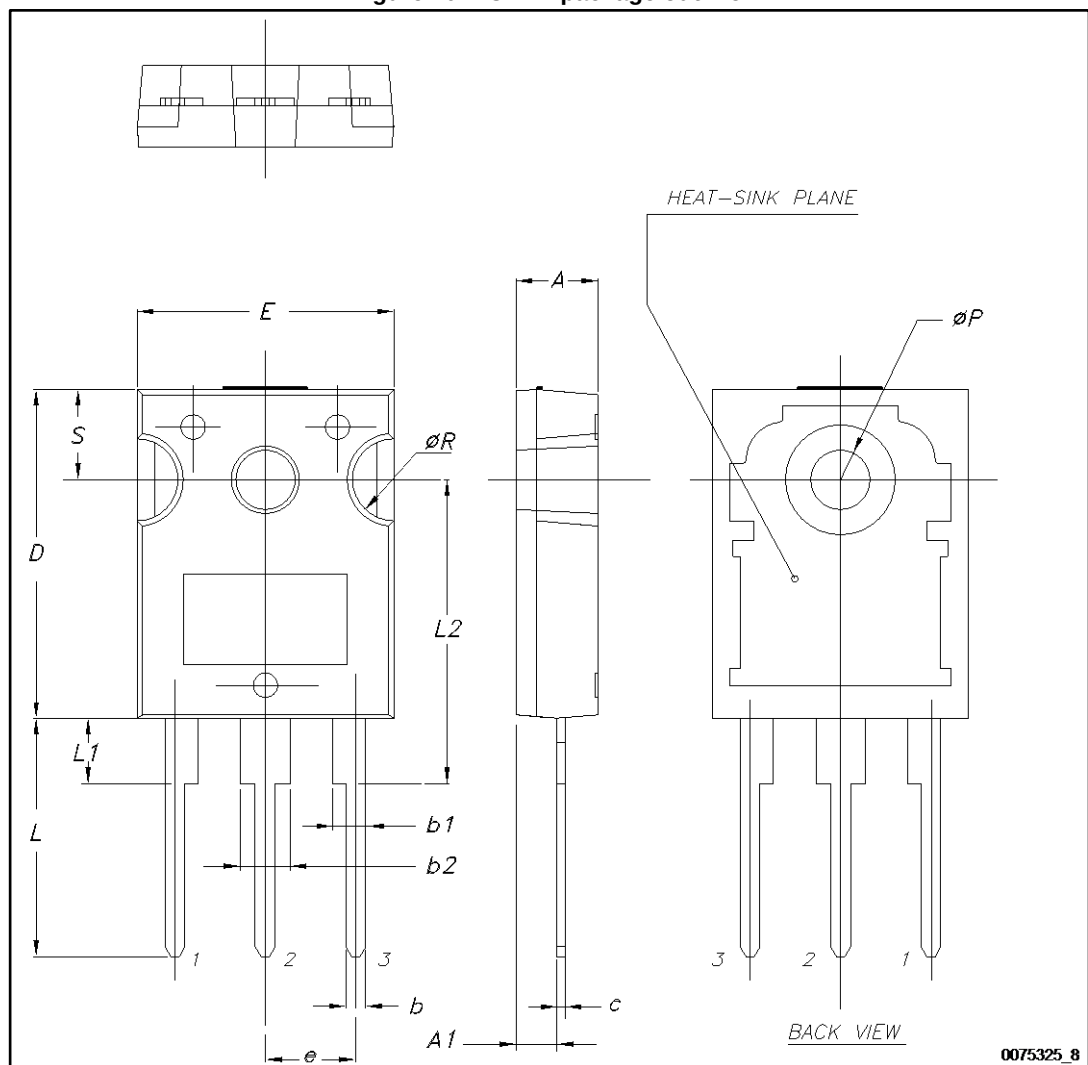


Table 6: TO-247 package mechanical data

| Ref.              | Dimensions  |       |       |        |       |       |
|-------------------|-------------|-------|-------|--------|-------|-------|
|                   | Millimeters |       |       | Inches |       |       |
|                   | Min.        | Typ.  | Max.  | Min.   | Typ.  | Max.  |
| A                 | 4.85        |       | 5.15  | 0.191  |       | 0.203 |
| A1                | 2.20        |       | 2.60  | 0.086  |       | 0.102 |
| b                 | 1.00        |       | 1.40  | 0.039  |       | 0.055 |
| b1                | 2.00        |       | 2.40  | 0.078  |       | 0.094 |
| b2                | 3.00        |       | 3.40  | 0.118  |       | 0.133 |
| c                 | 0.40        |       | 0.80  | 0.015  |       | 0.031 |
| D <sup>(1)</sup>  | 19.85       |       | 20.15 | 0.781  |       | 0.793 |
| E                 | 15.45       |       | 15.75 | 0.608  |       | 0.620 |
| e                 | 5.30        | 5.45  | 5.60  | 0.209  | 0.215 | 0.220 |
| L                 | 14.20       |       | 14.80 | 0.559  |       | 0.582 |
| L1                | 3.70        |       | 4.30  | 0.145  |       | 0.169 |
| L2                |             | 18.50 |       |        | 0.728 |       |
| ØP <sup>(2)</sup> | 3.55        |       | 3.65  | 0.139  |       | 0.143 |
| ØR                | 4.50        |       | 5.50  | 0.177  |       | 0.217 |
| S                 | 5.30        | 5.50  | 5.70  | 0.209  | 0.216 | 0.224 |

**Notes:**

<sup>(1)</sup>Dimension D plus gate protusion does not exceed 20.5 mm

<sup>(2)</sup>Resin thickness around the mounting hole is not less than 0.9 mm.

### 3 Ordering information

Table 7: Ordering information

| Order code | Marking    | Package | Weight | Base qty. | Delivery mode |
|------------|------------|---------|--------|-----------|---------------|
| STTH6003CW | STTH6003CW | TO-247  | 4.36 g | 30        | Tube          |

### 4 Revision history

Table 8: Document revision history

| Date        | Revision | Changes                                                                          |
|-------------|----------|----------------------------------------------------------------------------------|
| Oct-1999    | 5C       | Previous revision.                                                               |
| 18-Jun-2014 | 6        | Removed ISOTOP package.<br>Updated <i>Section 2: Package information</i> .       |
| 21-Nov-2016 | 7        | Updated <a href="#">Table 7: "Ordering information"</a> .<br>Minor text changes. |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved